

# MODEL 4073SQ-O

## OUTDOOR USED COOKING OIL CONTAINMENT TANK

**FRONTLINE**  
international

PROJECT \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
APPROVAL \_\_\_\_\_  
DATE \_\_\_\_\_

### SPECIFICATIONS

Outdoor version of our space-saving square tank with a larger footprint. With all the innovative features of the indoor version, plus added insulation to withstand extreme outdoor temperature fluctuations.



### STANDARD FEATURES

- Suitable for Direct-Plumbed®, Remote-Plumbed® or Caddy systems
- Heavy-gauge corrosion aluminum exterior
- Freestanding
- Corrosion aluminum tank platform bottom
- Control panel with power indication or digital reader
- Level indicators with safety overflow protection
- Easy to access and service components

### SYSTEM CONFIGURATION Select one or both of the following.\*

- ☐ **0-DP-KIT** Outdoor Tank Direct-Plumbed® Configuration  
☐ **0-CADDY-KIT** Outdoor Tank Caddy Configuration

\*You can Direct-Plumb your fryer and still choose/need a Caddy to draw oil from and move oil away from other FOG producing equipment.

### POWER CORD CONFIGURATION Select one of the following.

- ☐ **NA (North America):** Standard: NEMA 5-15 Voltage: 120V Frequency: 60Hz  
☐ **EU (European Union):** Standard: CEE 7/7 (Type F) Voltage: 230V Frequency: 50Hz  
☐ **UK (United Kingdom):** Standard: BS 1363 Voltage: 230V Frequency: 50Hz  
☐ **AU (Australia):** Standard: AS/NZS 3112 Voltage: 230V Frequency: 50Hz

### PLUMBING OPTION

- ☐ **INS-KIT-O** Oil Collection Port Installation Kit  
☐ **COLLECTION-VALVE-KIT** Anti-theft Locking Valve  
☐ **FRYER-HOSE-KIT** Fryer Oil Disposal Connection Hose.  
QTY of fryers \_\_\_\_  
☐ **R-CADDY-KIT** Indoor Remote Caddy configuration  
QTY of remote Caddy fill Station. \_\_\_\_

### INTERNET CONNECTIVITY OPTIONS

- ☐ **INTERNET-KIT** Internet Connection Wired.  
☐ **WIFI-KIT** Wi-Fi Module Wireless.  
☐ **GSM-KIT** GSM Modems Mobile.

### AGENCY APPROVAL OPTIONS

- ☐ **UL 197** ☐ **CE**  
☐ **UL NSF** ☐ **UKCA**  
☐ **UL 142/NFPA30**


Frontline International, Inc.

187 Ascot Parkway • Cuyahoga Falls, Ohio 44223 • 330-861-1100 • 877-776-1100 • [frontlineii.com](http://frontlineii.com) • Fax: 330-861-1105 • [info@frontlineii.com](mailto:info@frontlineii.com)

# MODEL 4073SQ-O

**FRONTLINE**  
international

## OUTDOOR USED COOKING OIL CONTAINMENT TANK

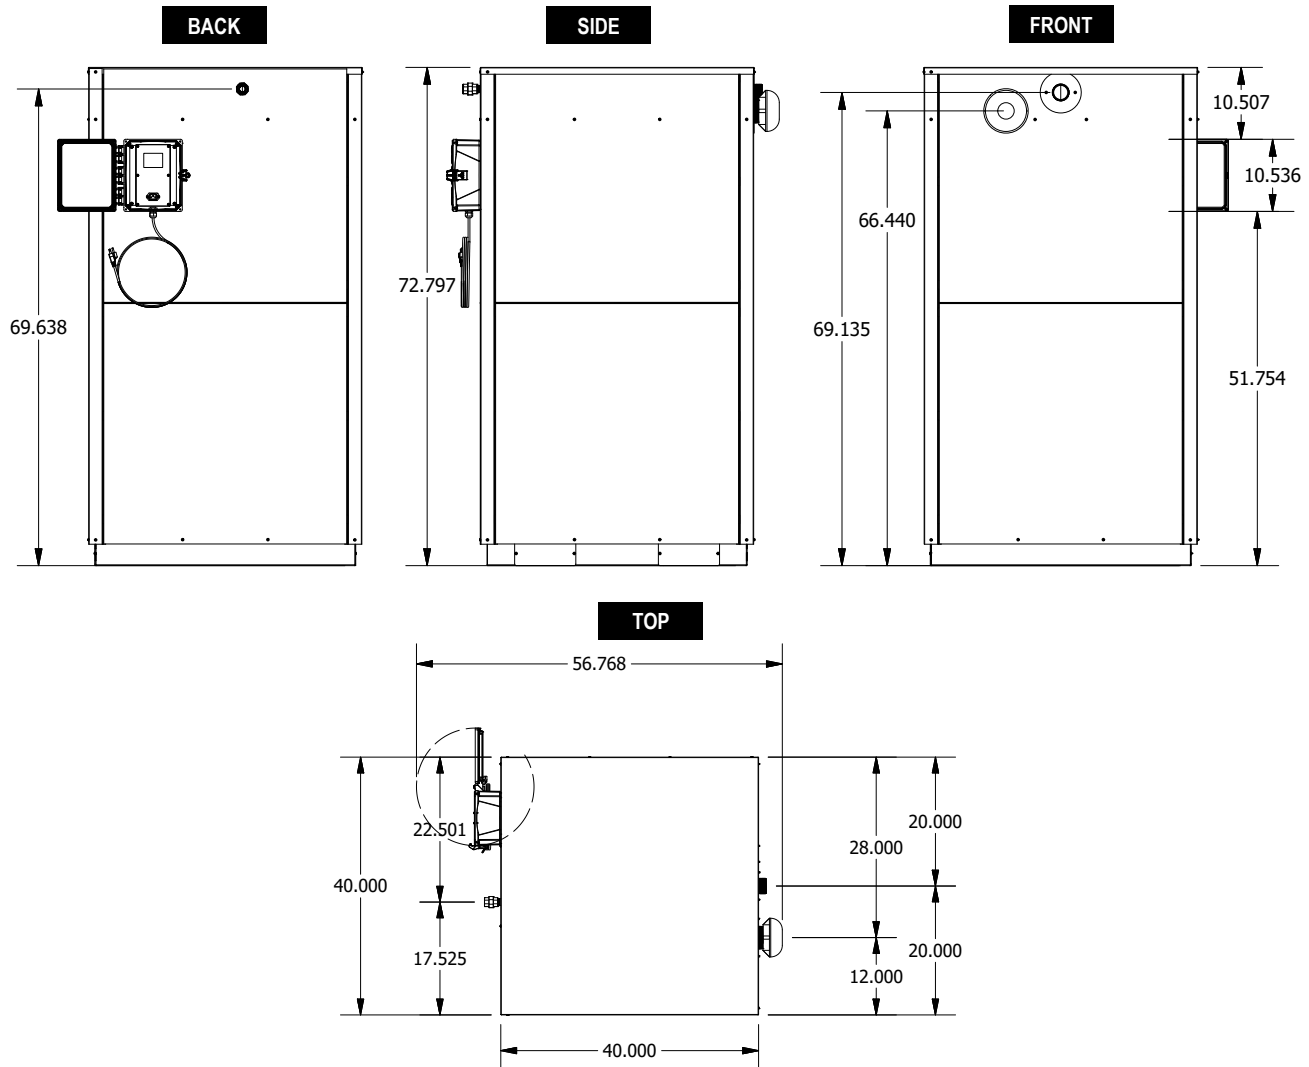

MODEL	TANK CAPACITY	SHIPPING WEIGHT	INSTALLATION SPACE REQUIREMENTS	POWER REQUIREMENTS
4073SQ-O	2640 Lb/352 Gal (1197 kg/1332 l)	580 lb (263 kg)	40 in. l x 40 in. w x 73 in. h (1016mm x 1016mm x 1855mm)	LV: 110 V 15 A, 60 Hz HV: 250 V 3.5 A, 50/60 Hz

\* Information is approximate and may vary at time of shipment due to options/add-ons per customer request.

### IMPORTANT

- The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
- Children should be supervised to ensure that they do not play with the appliance.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Not intended to be operated by means of an external timer or a separate remote-control system.
- This appliance is intended to be used in commercial kitchen applications.

**Frontline International, Inc.**

187 Ascot Parkway • Cuyahoga Falls, Ohio 44223 • 330-861-1100 • 877-776-1100 • [frontlineii.com](http://frontlineii.com) • Fax: 330-861-1105 • [info@frontlineii.com](mailto:info@frontlineii.com)