MODEL 10SS-LV-LOV

TRANSPORT CADDY

HOLDS 53 lb/7 gal (24 kg/26 l)

F	R			\					N		" "
i n	t	е	r	n	a	t	i	0	n	a	

PROJECT _	
QUANTITY_	
APPROVAL	
DATE	

SPECIFICATIONS

Designed to remove and transport used cooking oil from low oil volume (LOV) fryers, the LOV Caddy has a lower profile than Frontline's standard caddies to fit into tighter spaces. It also comes with an integral magnet compatible with LOV fryers that include a magnetic drain pan switch. For added convenience, the Frontline LOV Caddy is also backwards compatible with LOV fryers that use standard drain switches. One caddy does the job of two!

FILTER UPGRADE KITS

	FII	LTEF	R-KI	T-FF
--	-----	------	------	------

Caddy-To-Filtration System Upgrade Kit, Paper Media Filter

☐ FILTER-KIT-FS

Caddy-To-Filtration System Upgrade Kit, Stainless Steel Media Filter

AGENCY APPROVAL OPTIONS

- UL 197
- □ UL 1889
- CE CE
- UKCA

POWER CORD CONFIGURATION Select one of the following.

- NA (North America): Standard: NEMA 5-15 Voltage: 120V Frequency: 60Hz
- ☐ EU (European Union): Standard: CEE 7/7 (Type F) Voltage: 230V Frequency: 50Hz
- ☐ UK (United Kingdom): Standard: BS 1363 Voltage: 230V Frequency: 50Hz
- ☐ AU (Australia): Standard: AS/NZS 3112 Voltage: 230V Frequency: 50Hz

OPTIONAL CONFIGURATIONS

- REVERSIBLE PUMP
- HEATER





STANDARD FEATURES

- 100% heavy stainless steel construction
- · Smooth rolling heavy-duty, non-mark casters
- · Swivel front casters with brakes
- Extra large "crumb catcher" basket
- · Power switch and "break away" power cord
- Removable handle
- · Lock-in-place safety cover
- · Easy, quick-disconnect fittings
- · High-temperature hose
- Specially designed 5-gallon (19 l) per minute pump
- · Special filter screen to protect pump





MODEL 10SS-LV-LOV



TRANSPORT CADDY

HOLDS 53 lb/7 gal (24 kg/26 l)

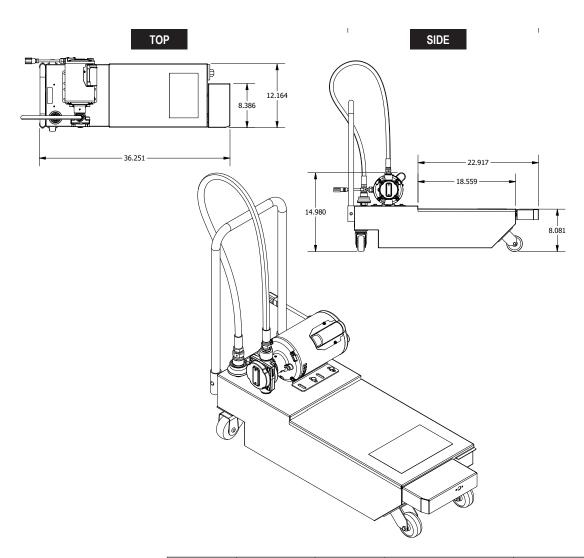



MODEL	CAPACITY	SHIPPING WEIGHT	INSTALLATION SPACE REQUIREMENTS	POWER REQUIREMENTS	
10SS-LV-LOV	53 lb /7 gal	125 lbs	36 in. l, 12 in. w, 28.7 in. h	LV: 110 V 15 A, 60 Hz	
	(24 kg/26 l)	(56.7 kg)	(914 mm x 305 mm x 729 mm)	HV: 250 V 3.5 A, 50/60 Hz	

^{*} Information is approximate and may vary at time of shipment due to options/add-ons per customer request.

IMPORTANT

- The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
- Children should be supervised to ensure that they do not play with the appliance.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- · Not intended to be operated by means of an external timer or a separate remote-control system.
- This appliance is intended to be used in commercial kitchen applications.